


NEW! FLEX Fittings...

Now Even More Flexible!

Introducing our new and improved FLEXFX fittings, now even more flexible! The expertly engineered design allows the same fitting to be used for both level and stair applications, simplifying the installation and ordering process. Plus, our new Universal Drilling Template makes drilling holes and aligning fittings a breeze.

Why FLEX☑?

- Made from high-quality 316-grade stainless steel for both exterior and interior applications.
- Durable and low-maintenance for long lasting beauty.
- Limited Lifetime Warranty.
 Details available at: railfx.net/resources/warranty/

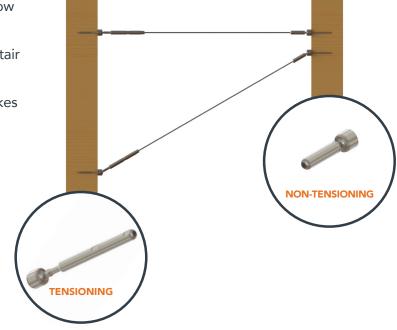





FLEXFX features our exclusive Push-Lock® fittings which do not require any special tools for installation. Simply push the cable into the fitting and it locks.

Plan Your FLEX Project

- Measure length of cable runs and add 5% to determine cable length needed.
- One tensioning and one non-tensioning fitting is needed per run of cable.
- 36" rail height typically has 10 cable runs and 42" rail heights typically have 12 cable runs. 10 tensioning and 10 non-tensioning fittings are needed for a typical 36" rail height application between 2 sets of end posts. Please reference our website for atypical railing configuration assistance in planning your project.
- Ideal for wood posts. For sleeved posts, longer screws must be purchased separately. See instructions for screw length guide.

SKU	Product Description	Master Carton Quantity	Carton Weight
FF-4-N-W-1	Non-Tensioning Flex Fitting, 1 pack	32	8.1 lbs.
FF-4-N-W-10	Non-Tensioning Flex Fitting, 10 pack	24	30.2 lbs.
FF-4-T-W-1	Tensioning Flex Fitting, 1 pack	32	10.9 lbs.
FF-4-T-W-10	Tensioning Flex Fitting, 10 pack	16	34.7 lbs.





100' and 500' Cable
1/8" Bulk cable for use with FlexFX Fittings



Cable Braces
For supporting cables between posts
Level and Stair braces available







FLEX Installation Kit
Includes tools needed for installation



Wood Post Protector Tubes
Protects posts when cable
enters/exits at an angle

